


HKI-8100 (HKI 81-34 H.264 | IPTV Encoder)

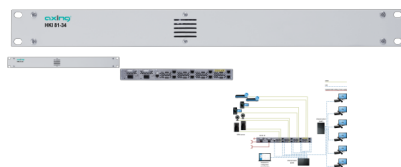

HKI-8100 (HKI 81-34 H.264 | IPTV Encoder)

8 HDMI --> IPTV HD, Max out 160Mbit/s 8134 H.264

Rating: Not Rated Yet

[Ask a question about this product](#)

Description

H.264 coding

8 × HDMI in 8 × SPTS

Web-based configuration, remote maintenance (SMARTPortal)

Two redundant power supplies (hot pluggable)

Inputs

Connector 8 × HDMI

Video resolution 1080p@60 Hz

Max. bit rate per channel 16 Mbit/s

Audio Encoder AAC, AAC+, AAC++, MP3

Video Encoder H.264

IP output

Supported protocols UDP, HTTP, RTSP, RTMP, ONVIF

Interfaces

Ethernet connectors (LAN) 9 × RJ-45

Ethernet standards IEEE 802.3, 100 Base-T @ Control

IEEE 802.3, 1000 Base-T / 1 GbE @ OUT 1 ... 8

Supported configuration protocols HTTP, AXING SMARTPortal*

General

Operating voltage 2 × 100...240 VAC/50...60 Hz

Power consumption 35 W

Operating temperature range (acc. to EN 60065) 0°C...+45°C

Dimensions (W × H × D) appr. 482 × 267 × 47 mm

Weight 4.150 kg

Comments

* encrypted, cloud-based application for configuration, monitoring and remote maintenance