


BVS 14-66 CATV amplifier 40 dB | 111 dB μ V CSO/CTB



BVS 14-66 CATV amplifier 40 dB | 111 dB μ V CSO/CTB

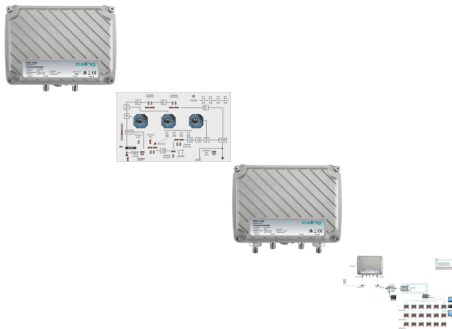

Remote CATV Amplifier

Rating: Not Rated Yet

[Ask a question about this product](#)

Description

- Remote power supply at input/output
- GaAs technology
- Downstream 85...1006 MHz
- Attenuation/equalization adjustable with PCB switches
- Interstage attenuation/equalization pluggable with jumpers
- Cable simulator BZU 80-02 pluggable
- Upstream 5...65 MHz
- Active/passive pluggable with jumpers
- Attenuation adjustable with PCB switch
- Interstage attenuation/equalization pluggable with jumpers
- Al-die-cast housing

- Test ports at in- and output

EMC according to EN 50083-2, class A

Downstream

Frequency range 85...1006 MHz

Gain 40 dB

Max. output level CSO/CTB (CENELEC raster, 41 channels, 60 dB IMA) 111 dBμV

Attenuation: adjustable in 1 dB steps 0...15 dB

Equalization: adjustable in 1 dB steps 0...15 dB

Attenuation interstage: pluggable with jumpers 0 | 2 | 4 | 6 dB

Equalization interstage: pluggable with jumpers 0 | 2 | 4 | 6 dB

Return loss ? 18 dB (-1.5 dB/Octave)

Noise figure typ. < 7dB

Upstream

Frequency range 5...65 MHz

Gain 30 dB

Attenuation: adjustable in 1 dB steps 0...15 dB

Equalization interstage: pluggable with jumpers 0 | 3 | 6 | 9 dB

Attenuation interstage: pluggable with jumpers 0 | 6 dB

RF connectors

Type CFA 12-00/CKA 12-00

Test port at in-/output -20 ±2.5 dB/-20 ±1.0 dB

General

Switching power supply 30...65 VAC / 50...60 Hz

Power indicator LED

Power consumption 14 W

Equipotential bonding connection 4 mm²

Operating temperature range (acc. to EN 60065) -20...+50°C

Dimensions (W × H × D) appr. 182 × 146 × 71 mm

Weight 1.123 kg

IP code IP54